

Dual Hydraulic Choke Manifold



Description


During well testing and flowback operations, the choke manifold is used to regulate the flowing pressure, control the fluid from the well, and achieve a manageable flow rate before the fluid enters the processing equipment.

Applications

- Well Testing
- Well Clean-ups
- Frack Flowback

Features & Benefits

- 2 Manual gate valves
- 2 Hydraulic remote actuated gate valves
- 2 Hydraulic remote actuated chokes
- Taps for pressure, temperature, injection, and bleed off

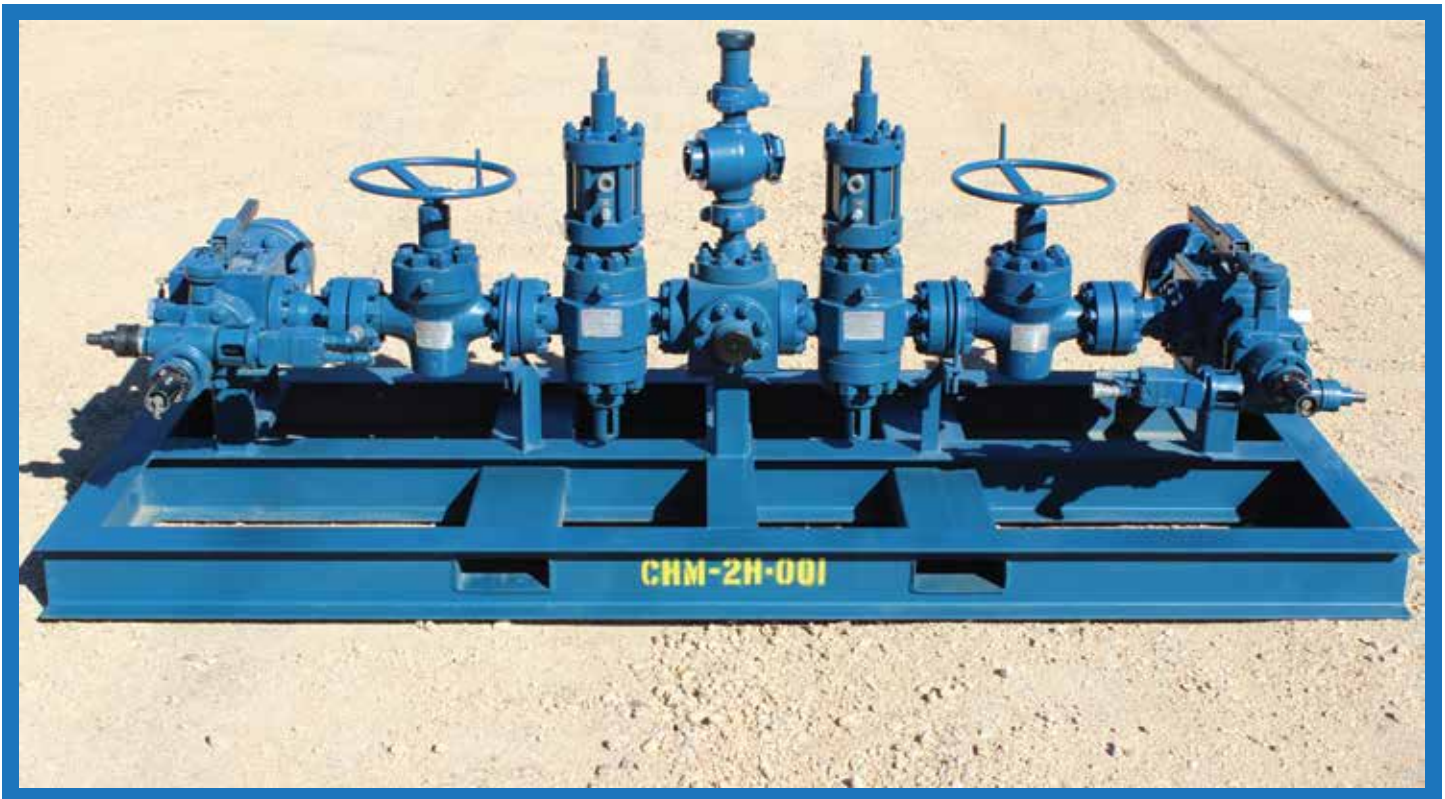

Operating Specification

MANUAL GATE VALVES (2 ea.)	2-1/16 in. 15K psi	3-1/16 in. 15K psi
HYDRAULIC GATE VALVES (2 ea.)	2-1/16 in. 15K psi	3-1/16 in. 15K psi
HYDRAULIC CHOKES (2 ea.)	3-1/16 in. 15K (2 in. Orifice)	3-1/16 in. 15K (2-3/16 in. Orifice)
MAX. WORKING PRESSURE	15,000 psi	15,000 psi
SERVICE	Standard	Sour
INLET	2 in. 1502 Weco	3 in. 1502 Weco
OUTLET	2 in. 1502 Weco	3 in. 1502 Weco
DATA PORT	9/16 in. Autoclave	9/16 in. Autoclave
SKID DIMENSIONS L x W x H	12 ft. x 4 ft. 6 in. x 5 ft.	14 ft. x 5 ft. x 5 ft.
WEIGHT	8,300 lbs.	9,500 lbs.